

# TRON LINEAR

The Tron Linear LED System is available in fixed lengths or as a continuous linear system which can be configured to meet your individual requirements. The system combines a Carrier Profile with Integrated Drivers along with a Light Profile which houses the LED and Diffuser. Our Dual Profile design and Offset construction optimise the appearance and eliminate Light Bleed.

## STANDARD SPECIFICATION


Lumen Output	4000 lm/m
Colour Rendering Index	CRI 80+/CRI 90+
Colour Temperature	2700K/3000K/3500K/ 4000K/5000K/6500K
Luminaire Beam Angle	100°
Protection	IP20
Colour	Black/White/Silver
Dimmable	DALI/on-off
Lumens per Watt	As per specification
Wattage	As per specification
Input	220-240V
Weight	Max 8kg

## STANDARD WARRANTY TERMS

FOC direct replacement luminaire	5 years
Extended warranty options	On request




## DIMENSIONS

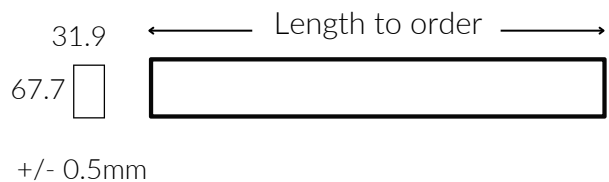

This product has a warranty period of 5 Years from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, and removal of the Q.C. date label; installation in an improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Prolight reserves the right to alter specifications without prior notice.

Copyright © 2023 Prolight Design Ltd. All rights reserved. Uncontrolled when printed.

# DESIGN MANUFACTURE CONSULTANCY SUPPLY



## Contact

[www.prolightdesign.com](http://www.prolightdesign.com)  
[hello@prolightdesign.com](mailto:hello@prolightdesign.com)  
(+44) 01380 739911



@Prolight\_Design

