


TRON COLLECTION

# TRON LINEAR


### SUSPENDED / SURFACE

The Tron Linear LED System is available in fixed lengths or as a continuous linear system which can be configured to meet your individual requirements. The system combines a Carrier Profile with Integrated Drivers along with a Light Profile which houses the LED and Diffuser. Our Dual Profile design and Offset construction optimise the appearance and eliminate Light Bleed.


STANDARD SPECIFICATION		STANDARD WARRANTY TERMS
Lumen Output	1000 per metre	FOC direct replacement luminaire 5 years from supply
Wattage	16W	Extended warranty options Available on request
Lumens per Watt	62.5	
Colour Rendering Index	CRI 80+ / CRI 90+	DIMENSIONS
Colour Temperature	3000K / 3500K / 4000K	
Diffuser:	Opal, Microprismatic (UGR < 19)	30 Length to order
Luminaire Beam Angle	100°	8
Protection	IP20	
Colour	Black / White / Silver	
Input Voltage	220-240V	
Customised specification	Available on request	







Performance: Values are recorded at 4000K, Maximum Output. Due to our commitment to continuous technical development please contact us for the latest performance values.

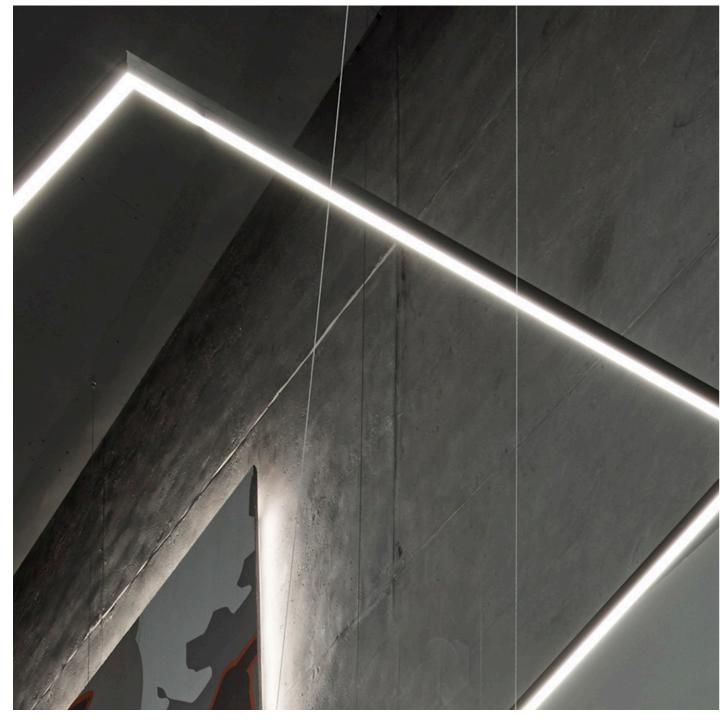



## TRON LINEAR

#### Customised

Tron Linear can be customised beyond the Standard Specification to meet your requirements in terms of Output, Colour Temperature and Dimming Control.

#### Bespoke

Our full Bespoke service allows the complete configuration of the Tron Linear solution including the Size, Colour Finish and more complex lighting solutions such as RGBW and Casambi Control. When your design brief goes beyond Standard or Customised configurations then we can work with you to provide a Bespoke specification.

125
250
500
1000
2000
3000
П
90° corner
Length to order

11

### Available finishes



Performance: Values are recorded at 4000K, Maximum Output. Due to our commitment to continuous technical development please contact us for the latest performance values.